



Блок-диаграмма Conceptpower Upgrade

Стандартная версия (Одиночный входной кабель)

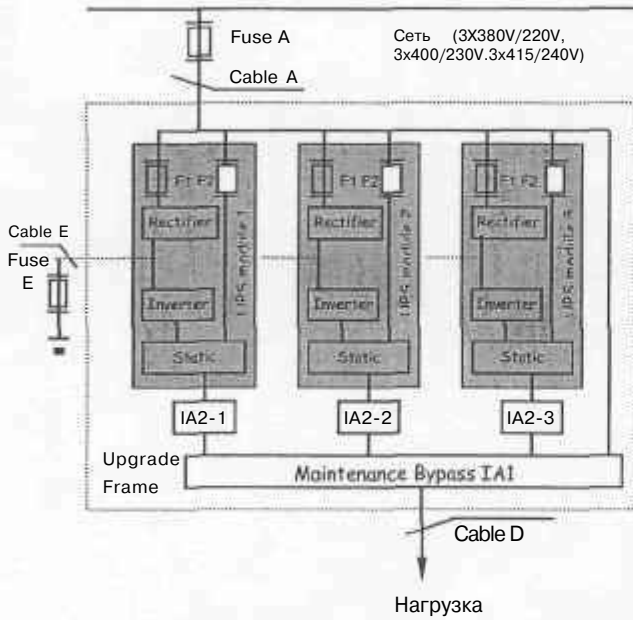

Версия по требованию (Двойной входной кабель)

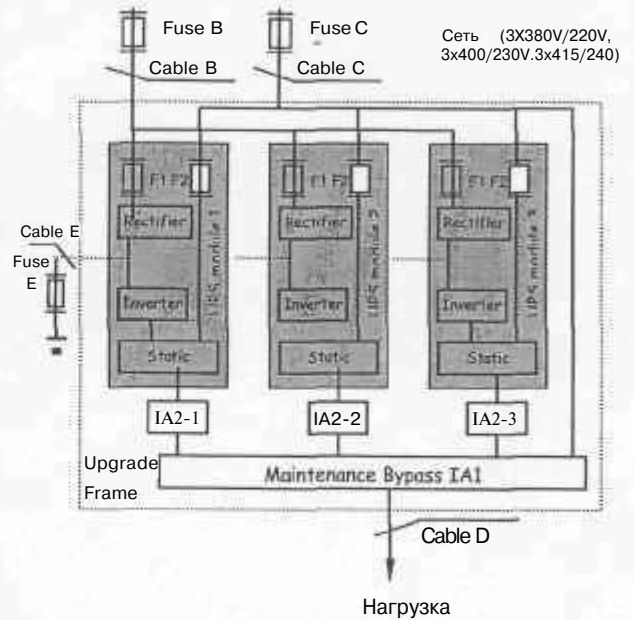

Стандартная версия (Одиночный входной кабель)

Power (kVA)	Fuse A (Agl/CB)	Cable A (IEC 60950-1:2001)	Cable D (IEC 60950-1:2001)	Fuse E +/N/-	Cable E +/N/-
10	3x63	5x10	5x10	3x32A	3x4
10+10	3x63	5x10	5x10	3x63A*	3x10*
10+10+10	3x63	5x10	5x10	3x100A*	3x25*
15	3x100	5x25	5x25	3x63A	3x10
15+15	3x100	5x25	5x25	3x100A*	3x25*
15+15+15	3x100	5x25	5x25	3x125A*	3x35*
20	3x100	5x25	5x25	3x63A	3x10
20+20	3x100	5x25	5x25	3x125A*	3x35*
20+20+20	3x100	5x25	5x25	3x160A*	3x50*
30	3x125	5x35	5x35	3x80A	3x16
30+30	3x125	5x35	5x35	3x125A*	3x35*
30+30+30	3x125	5x35	5x35	3x200A*	3x70*
40	3x200	5x70	5x70	3x100A	3x25
40+40	3x200	5x70	5x70	3x160A*	3x50*
40+40+40	3x200	5x70	5x70	3x250A*	3x120*

Cable Sections and Fuse Ratings recommended by European standards. Alternatively, local standards to be respected.

* значения только для общих батарей

Версия по требованию (Двойной входной кабель)

Power (kVA)	Fuse B (Agl/CB)	Cable B (IEC 60950-1:2001)	Fuse C (Agl/CB)	Cable C (IEC 60950-1:2001)	Cable D (IEC 60950-1:2001)	Fuse E +/N/-	Cable E +/N/-
10	3x63	5x10	3x63	4x10	5x10	3x32A	3x4
10+10	3x63	5x10	3x63	4x10	5x10	3x63A*	3x10*
10+10+10	3x63	5x10	3x63	4x10	5x10	3x100A*	3x25*
15	3x100	5x25	3x100	4x25	5x25	3x63A	3x10
15+15	3x100	5x25	3x100	4x25	5x25	3x100A*	3x25*
15+15+15	3x100	5x25	3x100	4x25	5x25	3x125A*	3x35*
20	3x100	5x25	3x100	4x25	5x25	3x63A	3x10
20+20	3x100	5x25	3x100	4x25	5x25	3x125A*	3x35*
20+20+20	3x100	5x25	3x100	4x25	5x25	3x160A*	3x50*
30	3x125	5x35	3x125	4x35	5x35	3x80A	3x16
30+30	3x125	5x35	3x125	4x35	5x35	3x125A*	3x35*
30+30+30	3x125	5x35	3x125	4x35	5x35	3x200A*	3x70*
40	3x200	5x70	3x200	4x70	5x70	3x100A	3x25
40+40	3x200	5x70	3x200	4x70	5x70	3x160A*	3x50*
40+40+40	3x200	5x70	3x200	4x70	5x70	3x250A*	3x120*

* значения только для общих батарей