

SBL 170-12HR

(843w/cell)


High Performance battery with 10-12 years design life (EUROBAT)

Status: 08-2009


Specifications

Nominal Voltage		12V
Capacity (25°C@1.60V/C)		843W@10min-rate
Dimensions	Length	485mm (19.09inch)
	Width	172mm (6.77inch)
	Height	240mm (9.45inch)
	Total Height	240mm (9.45inch)
Approx. Weight		47kg (103.4lbs)
Maximum charging current		45A
Maximum discharge current		1500A (5sec.)
Internal resistance (Fully charged, 25°C)		Approx. 5mΩ
Capacity affected by temperature (10hr)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-discharge (25°C)	3 month	Remaining Capacity: 91%
	6 month	Remaining Capacity: 82%
	12 month	Remaining Capacity: 65%
Nominal operating temperature		25°C ±3°C (77°F±5°F)
Operating temperature range		-15°C ~ 50°C (5°F ~ 122°F)
Float charging voltage (25°C)		13.65 to 13.80V
Cyclic charging voltage (25°C)		14.50 to 14.90V
Absorbent glass mat technology		
ABS (UL94-HB) container		Recognized by UL & CE


Dimensions

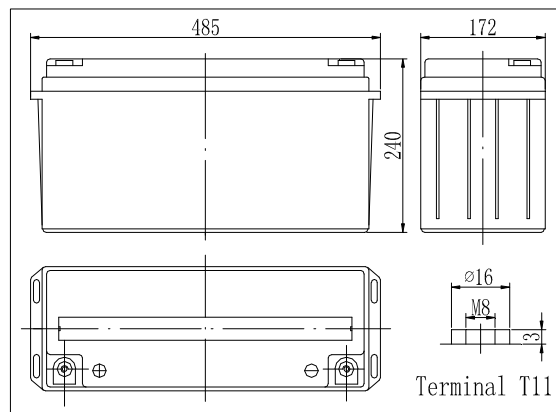


Temperature Effects in Relation to Battery Capacity

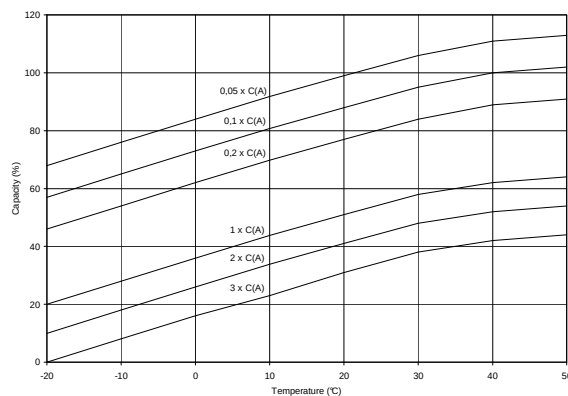

Cycle Life (25°C)

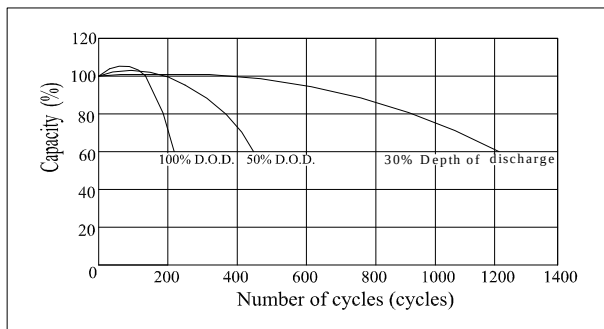

Charging Characteristics (25°C)

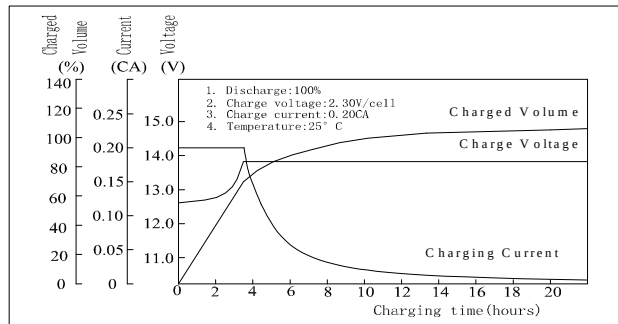

Constant Current Discharge Characteristics (Ampere per Battery, 25°C)

F.V/TIME	2min	4min	6min	8min	10min	15min	20min	30min	60min	90min
9.60V	1100,33	821,44	640,05	547,09	470,84	347,37	279,95	201,99	108,78	86,78
9.90V	1025,55	767,91	597,53	518,35	445,32	332,42	263,64	194,51	104,74	83,79
10.2V	993,58	745,19	579,20	505,88	434,33	326,11	256,61	191,22	102,94	82,29
10.5V	941,82	706,48	560,14	486,97	413,06	314,82	252,72	188,23	102,64	81,25
10.8V	890,06	667,47	540,93	467,76	391,66	303,24	248,68	185,09	102,19	80,35

Constant Power Discharge Characteristics (Watt per Battery, 25°C)

F.V/TIME	2min	4min	6min	8min	10min	15min	20min	30min	60min	90min
9.60V	11840,11	8839,15	6887,31	5887,57	5057,63	3738,21	3058,63	2208,47	1189,52	951,62
9.90V	11036,16	8264,78	6428,16	5576,56	4791,66	3577,94	2880,88	2125,87	1144,63	914,81
10.2V	10692,23	8018,74	6231,50	5444,88	4672,98	3508,63	2803,67	2089,96	1124,88	897,75
10.5V	10134,31	7601,17	6027,05	5238,69	4443,40	3386,48	2761,48	2056,75	1120,39	888,77
10.8V	9577,26	7181,87	5820,86	5034,24	4213,82	3263,46	2718,39	2022,63	1114,11	879,80

All mentioned values are average values.